

ITR630 – DND/MUR



DESCRIPTION


The DND/MUR (Do Not Disturb / Make Up Room) module is a simple way for guests to communicate with staff from their room. Either don't want to be disturbed or need your room to be cleaned, it is as simple as touching a button. The product includes a doorbell button to announce visitors in a kindly way. Besides, optionally the doorbell can be disabled whether the "Do Not Disturb" is active.

Module needs an extra 12-24V VDC power supply for LEDs.

KNX bus enables information exchanges with sensors and the integration with a building management system.

The outdoor module can be customized with the room number, icons (Do Not Disturb / Make Up Room), logo and name of the hotel. Hotels can simply integrate our technology into their own design.

CONNECTION DIAGRAM

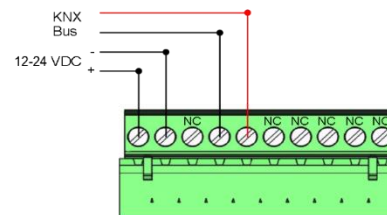


FUNCTIONS

- DND (Do Not Disturb)
- MUR (Make Up my Room)
- Doorbell

CONFIGURATION

The complete configuration of the device is performed via ETS 3 or higher.

DIMENSIONS

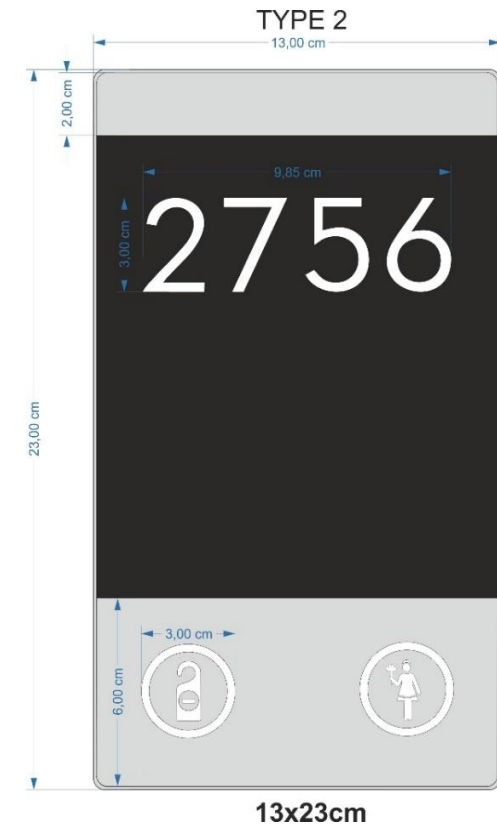

TECHNICAL DATA

Device	ITR630
Power Supply	EIB Power Supply Extra 12-24V DC for LEDs
Power Consumption	KNX: 10mA 12-24V DC: 22mA
Mode of commissioning	S-Mode
Type of protection	IP 20
Temperature Range	Operation (- 5°C ...55 °C) Storage (- 25°C ...70 °C)
Maximum air humidity	<90 RH
Mounting	Flush Mounting
Certification	EIB-Certified

